

FRAME PUNCH

EDGE

ELEVATE EVERY EDGE!

WITH A FINER FINISH

STEP INTO THE REALM OF REFINED ELEGANCE WITH FRAME PUNCH, AN EXCEPTIONAL OFFERING FROM OUR PASTEL COLOUR FULLBODY TILES SERIES. THIS COLLECTION REDEFINES SOPHISTICATION WITH ITS METICULOUSLY CRAFTED DEBOSSSED EDGES, CREATING A STRIKING FRAMED EFFECT THAT ADDS DEPTH AND ARTISTRY TO EVERY TILE. DESIGNED FOR THE DISCERNING EYE, FRAME PUNCH COMBINES SOFT, PASTEL TONES WITH BOLD, CONTEMPORARY DETAILING, DELIVERING A HARMONIOUS BALANCE OF SUBTLETY AND STATEMENT.

IDEAL FOR ELEVATING BOTH RESIDENTIAL AND COMMERCIAL SPACES, THESE TILES ARE A TESTAMENT TO INNOVATIVE DESIGN AND TIMELESS APPEAL.





PASTEL COLORS IN FRAME

#ELEGANT EDGE

Frame Punch is a sophisticated edge-embossed design from the Fullbody Pastel Colour series by Armano Fullbody. Crafted for elegance and durability, it features a seamless blend of subtle punch effect and soft pastel tones, making it ideal for modern, minimalist, and luxurious interiors.





FRAME ON

SLEEK, STRUCTURED, DEFINED

Frame Punch is preferred in architectural designs for its refined edge-debossed detailing and seamless pastel tones. Its full-body composition ensures durability, making it ideal for luxury interiors, feature walls, and statement flooring, adding depth and sophistication to modern spaces.



600X1200

ARCHITECTURAL PERFECTION

The elongated rectangular shape (2:1 aspect ratio) is visually appealing and works well in both residential and commercial spaces.

- Feature Walls: Create a bold statement in living rooms, lobbies, or restaurants.
- Flooring: Use in large spaces to add a modern, artistic touch.
- Commercial Spaces: Ideal for hotels, offices, or retail stores looking to make a design statement.
- Residential Spaces: Perfect for kitchens, bathrooms, or accent walls in homes.



INDEX

→ The Portfolio

1	<u>Coffee Brown Frame</u>
2	<u>Ocre Yellow Frame</u>
3	<u>Cobalt Blue Frame</u>
4	<u>Light Green Frame</u>
5	<u>Wine Frame</u>
6	<u>Iris Frame</u>
7	<u>Pink Frame</u>
8	<u>Black Frame</u>

I N D E X

9	<u>Brick Red Frame</u>
10	<u>Beige Frame</u>
11	<u>Dark Green Frame</u>
12	<u>Sky Frame</u>



PURE HYGIENE
SURFACE



FIRE
RESISTANCE




SCRATCH
RESISTANCE



FREEZE
RESISTANCE



ABSORB OFF
ODOURS



TEMPERATURE
RESISTANCE



CHEMICAL
RESISTANCE



UV
RESISTANCE

Coffee Brown frame

600x1200






The Coffee Brown Frame Punch Tile is all about quiet strength and subtle sophistication. With its deep, muted brown tone, it lends a sense of stability and character to any room. The frame design adds a structured edge, making it perfect for creating cozy, grounded spaces like reading nooks, dens, or accent corners.

Coffee Brown frame

Ocre yellow frame

600x1200



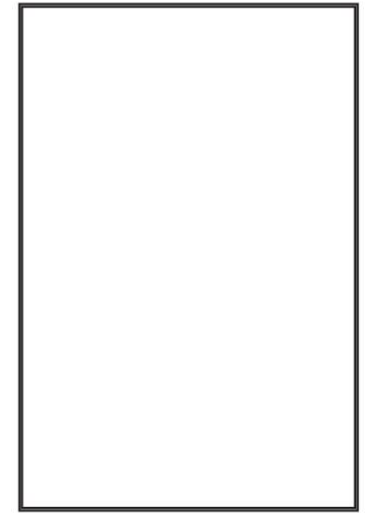

=The Ochre Yellow Frame Punch Tile brings a fresh burst of color with its soft yellow tone and clean, structured design. Its framed surface adds subtle depth to walls, making it ideal for spaces that need a lift without being too bold. The warmth of yellow creates a welcoming atmosphere, while the frame pattern keeps the look polished and modern.

Ocre Yellow frame

Cobalt Blue frame

600x1200





-A bold yet elegant choice designed to transform any space with depth and character. The rich cobalt blue shade offers a modern twist on a classic tone, while the raised frame pattern adds a touch of architectural sophistication to your walls. Perfect for bathrooms, living areas, hallways, or feature walls, these tiles create a striking visual impact.

Cobalt Blue frame

Light Green frame

600x1200






The Light Green Frame Punch Tile brings a calm, refreshing vibe to any space with its soft pastel tone and elegant framed design. This subtle green adds a sense of serenity, perfect for creating peaceful interiors in bedrooms, bathrooms, or garden-facing walls.

Light Green frame

Wine frame
600x1200



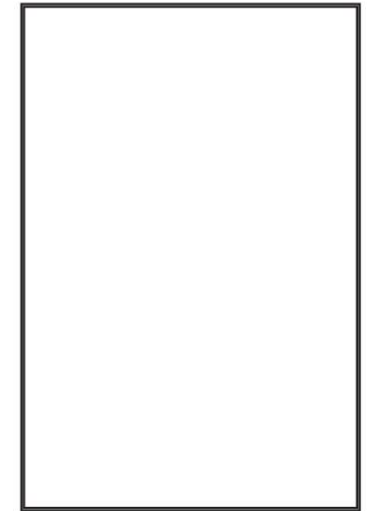

The Wine Frame Punch Tile offers a deep, expressive tone that instantly elevates any space with richness and character. Its smooth surface, framed with subtle detailing, brings structure to walls while letting the color speak for itself. Ideal for feature areas like dining rooms, quiet lounges, or intimate corners, this tile adds a sense of depth and mood.

Wine frame

Iris frame

600x1200



Pink frame
600x1200



Black frame
600x1200



Brick Red frame

600x1200



Beige frame

600x1200



Dark Green frame

600x1200



Sky frame

600x1200



Technical Features



Wide Range of Colors, Sizes, Thicknesses & Finishes

The surfaces are available in a wide variety to fit in all types of spaces.



Hygienic Surfaces

Fully safe and compatible with food. It is very easy to clean.




Easy to Clean

No special cleaning products required.



Unalterable Colours

Without any organic pigment, the color of the surfaces can resist UV radiation and extreme climatic conditions.




Heat Resistant

The surfaces are made of high-temperature resistant material.



Chemical Resistant

The surfaces are resistant to detergents and disinfectants.



Breaking Strength

It's thinness provides great resistance to bending.



Environment Friendly

100% Natural. These surfaces do not release any substances, also it can be easily milled and recycled.



Stain Resistant


The surfaces do not stain when in contact with acids such as lemon or with cleaning products such as bleach or ammonia.




Frost Resistant

The surfaces are resistant to frost.

Tiles Laying Instructions

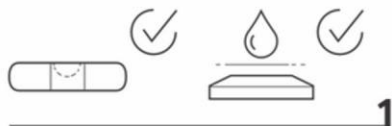


The substrate to be tiled must be perfectly leveled. We recommend that damp areas be waterproofed before hand and the levelling in the adhesive layer must be uniform to prevent the emergence of tile edges.

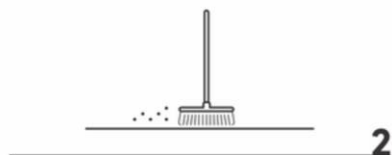


For better bonding strength of the adhesive, we recommend first cleaning the surface to be tiled.




The type of adhesive to be used is determined by the properties of the substrate to be tiled, as well as the type of the chosen ceramic tile, the tile format and the end use.

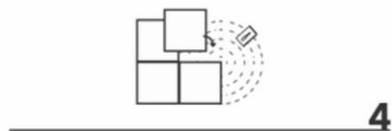


The thin-bed installation method is recommended with a flexible adhesive. For 3+ mm pieces with a glass fibre base, the buttering-floating technique is recommended, paying special attention to fully covering the corners.




Careful handling is advisable to prevent nipped edges, chipping or scratches on the tile surface.

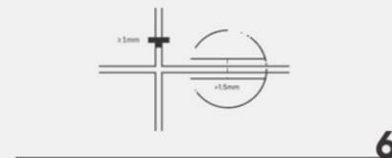

The separation between pieces must be more than 1.5 mm. The cross-spacers to be used must be at least 1 mm.



We recommend that you compensate the levelling for any possible movement or contraction of already-installed material. This procedure will prevent most minor differences in levels.

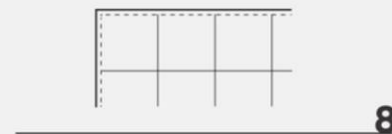

We recommend that you consider the inclusion of perimeter joints, which will help absorb any movements after installation. If the substrate already has structural joints or dividing joints, these must be respected when ceramic tiles are installed.



The installation joints must be empty and free of bonding materials and traces of dirt and grime. In this way, the adhesion of the grout will be improved and will be more effective.



When laying floor coverings, and once the ceramic tile is laid, we recommend that you protect the surface until the building project is complete. Following this procedure will safeguard the material and will make cleaning easier.

TECHNICAL SPECIFICATION

Sr. No.	CHARACTERISTICE	STANDARD AS PER IS 15622:2006 GROUP BIA	MEAN VALUE OF ARMANO VITRIFIED TILES
1	Deviation in Length & Width	± 0.6%	± 0.4%
2	Deviation In Thickness	± 0.5%	± 0.4%
3	Straightness of Sides	± 0.5%	± 0.4%
4	Rectrangularity	± 0.6%	± 0.5%
5	Surface Flatness	± 0.5%	± 0.5%
6	Hardness on Mohs Scale	> 6	> 7
7	Water Absorption	< 0.5%	≤ 0.05%
8	Flexural Strength (Mor)	> 35 N/mm ²	> 40 N/mm ²
9	Abrasion Resistance	< 175 N/mm ²	< 145 N/mm ²
10	Sjid Resistaance	> 0.4	> 0.4
11	Bulk Density	> 2	> 2.4
12	Crost Resistance	Frost Proof	Frost Proof
13	Chemical Resistance	No Damage	No Damage
14	Thermal Shock Resistance	No Damage	No Damage
15	Thermal Expansion	< 9x10	< 6x10
16	Stain Resistance	Resistance	Resistance
17	Moisture Expansion	Nill	Nill
18	Glossiness	Gloss Meter	Min. 90 reflection
19	Breaking Strength	1300 N	2000 N

PACKING DETAILS

Sr. No.	Size	Piece Per Box	Sq. mtr.	Sq. ft.
01	600x1200mm	2	1.44	15.50

